

# Rechargeable lithium-ion battery

## VL 37570

High performance  
"Fat D"-size cylindrical cell



### Benefits

- Extended autonomy and life for mobile systems
- Wide operating temperature range
- Recommended for ruggedized designs
- Easy integration into compact and light systems

### Key features

- High power
- High voltage
- Very high energy density (385 Wh/l, 175 Wh/kg)
- Unrivalled low temperature performance
- Excellent charge recovery after long storage, even at high temperature
- Maintenance-free
- Long cycle life (over 70 % initial capacity after 500 cycles 100 % DoD)
- Built-in safety vent and circuit breaker
- Restricted for transport (Class 9)
- Underwriters Laboratories (UL) Component Recognition (File Number MH15076)

### Main applications

- Mobile asset tracking
- Rack-mount telecom batteries
- Small UPS
- Soldier of the future equipment
- Portable radios
- Professional portable lighting
- Electric bikes and personal mobility
- Portable gas analysers
- Professional video

### Cell size references

Fat UM1 – Fat R20 – Fat D

### Electrical characteristics

Nominal voltage (under 1.4 A at 20°C)	3.7 V
Typical capacity 20°C (under 1.4 A at 20°C 2.5 V cut-off)	7 Ah

### Mechanical characteristics (sleeved, without tabs)

Diameter (max)	37.40 mm (1.472 in)
Height (max)	59.50 mm (2.343 in)
Typical weight	149 g (5.26 oz)
Lithium equivalent content	2.1 g
Nominal energy	25.9 Wh

### Operating conditions

Charge method	Constant Current/Constant Voltage
Maximum charge voltage	4.20 +/- 0.05 V
Maximum recommended charge current**	7 A (~C rate)
Charge temperature range*	-20°C to +60°C (-4°F to +140°F)
Time at 20°C	To be set as a function of the charge current: C rate → 2 to 3 h C/2 rate → 3 to 4 h C/5 rate → 6 to 7 h
Maximum continuous discharge current***	14 A (~2C rate)
Pulse discharge current	up to 28 A (~4C rate)
Discharge cut-off voltage	2.5 V
Discharge temperature range	-50°C to +60°C (-58°F to +140°F)


\* Consult Saft for optimized charging below 0°C

\*\* Electronic protection circuits within battery packs may limit the maximum charge/discharge current allowable. Consult Saft.

\*\*\* At rates >1C self-heating may limit runtime



# VL 37570

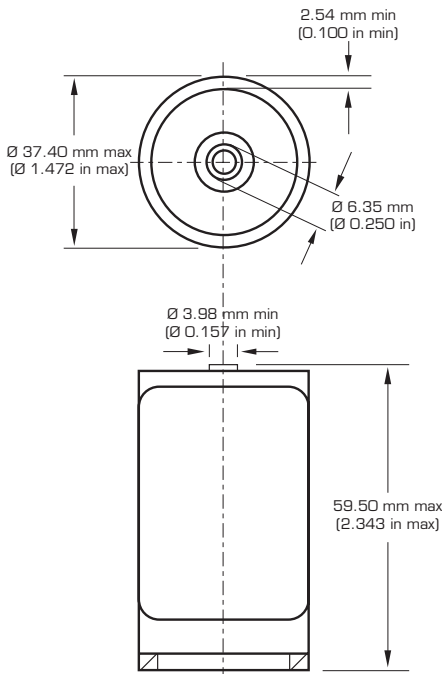

## Built-in protection devices ensure safety in case of:

- Exposure to heat
- Exposure to direct sunlight for extended periods of time
- Short circuit
- Overcharge
- Overdischarge

## When handling Saft VL batteries:

- Do not solder directly to cell terminal (use tabbed versions instead)
- Do not disassemble
- Do not remove the protection circuit
- Do not incinerate

## Transportation and storage:

- Store in a dry place at a temperature preferably not exceeding 30°C (86°F)
- For long-term storage, keep the battery preferably within a (30 ± 15) % state of charge

## Saft


### Specialty Battery Group

12, rue Sadi Carnot  
93170 Bagnolet - France  
Tel.: +33 (0)1 49 93 19 18  
Fax: +33 (0)1 49 93 19 69


313, Crescent Street  
Valdese, NC 28690 - USA  
Tel.: +1 (828) 874 41 11  
Fax: +1 (828) 879 39 81

[www.saftbatteries.com](http://www.saftbatteries.com)


## Typical discharge profiles at +20°C

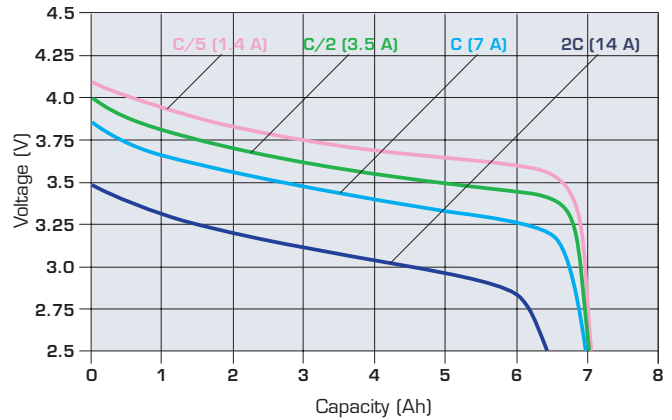

## Discharge profiles (1.4 A - C/5 rate) at various temperatures

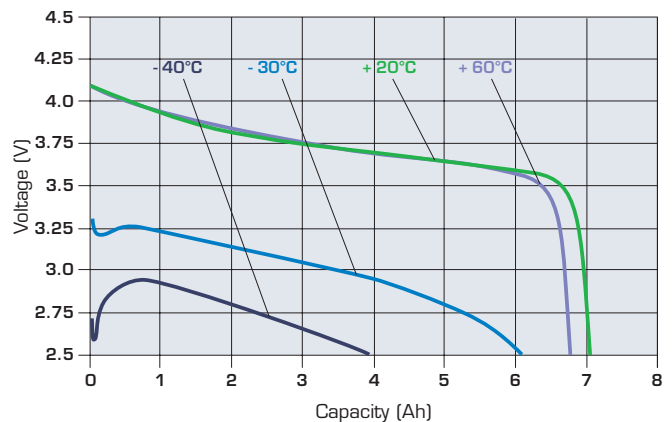

## Charge characteristics to 4.2 V at +20°C (C/5, C/2 and C rates)

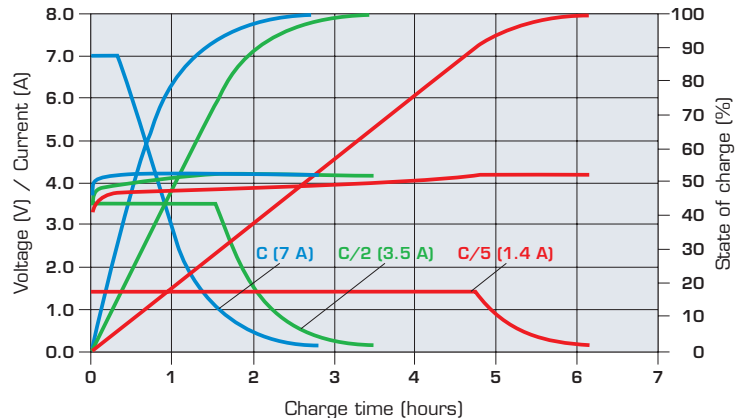

Doc. N° 54055-2-1107

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.

Published by the Communications Department.

Photo credit: Saft.

Société anonyme au capital de 31 944 000€  
RCS Bobigny B 383 703 873

Produced by Arthur Associates.

