

MATRICS Ni-Cd battery

MAss Transit & Rail Integrated Compact System



MATRICS: targeted performance for on-board rail applications

MATRICS is Saft's cutting-edge design of compact nickel-cadmium block battery, embodying optimum performance and low life cycle cost. It is engineered specifically for mobile on-board applications for today's clean, safe and efficient LRV, metro, EMU, electric locomotive and high speed rail systems.

MATRICS provides a new solution to the overall performance demands of mass transit rail systems. Saft has over 15 years experience in developing highly efficient sintered/pbe technology, and MATRICS utilises this expertise to great advantage.

Emergency lighting, air conditioning, computing systems, door opening controls and totally reliable back-up energy for electric traction make MATRICS ideal for your mass transit system.

Specifically for rail systems

Saft pro-actively respond to customers' wishes for smaller, lighter battery systems, optimised for reduced maintenance and low life cycle cost. Engineers can now rethink the wisdom of building-in conventional battery compartments for, with MATRICS, vehicle design and construction can be rationalised.

Lighter-weight MATRICS integrates a complete, compact system tailored to individual requirements, using less energy and costing less to carry, leading to increased passenger comfort and greater profitability.

A new concept with a long track record

Saft build MATRICS to tolerate heavy vibration, wide fluctuations in operating temperature, and physical and electrical abuses that frequently destroy lead acid batteries in service. The battery retains its excellent performance and capacity when using its rapid charge/discharge capability, even after several years in service.



The lightweight battery for demanding rail duties

Ni-Cd excellence – smaller and lighter

Competitive rail markets know that every kilogram and cubic centimetre saved leads to increased efficiency. In response, MATRICS offers significant weight and volume advantages by marrying sintered/pbe and wrapped plate stack technologies with membrane separators of the type specified in Saft aviation batteries.

Additionally, the advantages of MATRICS' block construction combined with integrated water filling system and tailored tray design retain all the advantages of Ni-Cd in a slim, lighter-weight package. MATRICS shows a 40% size and volume advantage over conventional Ni-Cd products and double that of lead acid batteries.

With you all the way

When Saft engineers collaborate with your engineering team to develop your optimum battery specification, the size and performance characteristics of MATRICS are carefully integrated into a complete solution to suit individual applications.

Keeping down life cycle costs

By considering all aspects of the battery's operation, and finding the optimum specification, Saft engineers will maximise cost savings and offer a truly low life-cycle cost solution.

With minimal maintenance, a higher quality output per initial outlay, and enhanced passenger comfort and safety, MATRICS clearly represents the most cost-efficient choice.

MATRICS

Reduced volume

Reduced footprint

Reduced weight



Designed-in reliability

No better insurance exists against unexpected power loss, or to guarantee smooth on-board systems operation than the total reliability of Saft Ni-Cd batteries.

MATRICS is your guarantee. It cannot suffer from sudden death, even in extreme temperatures from -50°C to $+70^{\circ}\text{C}$ (-58°F to $+158^{\circ}\text{F}$). Robust construction, engineered electrolyte and reliable dimensional stability ensure a marked difference in reliability over other batteries.



40% size and volume advantage

Lower life cost optimised performance

The acquisition of a railway battery is a long-term investment. With lead acid batteries, running costs include not only the acquisition cost, but also significant on-going maintenance and expensive replacements over 15+ years. Compromises in vehicle design, and higher energy requirement for transportation of heavy equipment are additions 'hidden' in overall operating expenditure.

MATRICS is different

A MATRICS system optimised to your application will generate substantial savings over the life of the battery. Each component is precisely specified for your particular requirement to optimise life cycle cost for a quality product with a 15+ years trouble-free life.

With MATRICS, opportunities arise for designers to rationalise overall costs by reducing vehicle weight, expand passenger compartments, improve comfort and safety factors, minimise personnel costs and maintenance, and enjoy peace of mind with the installation of a completely reliable electrical system.


Advantages all round

After 5 years MATRICS begins to show clear cost advantages over lead acid. After 30 years in operation, MATRICS will have provided total reliability at around 30% of the cost for a lead acid battery and its replacements.


Lead acid technology suffers from material degradation throughout its life. Critically, performance is radically reduced and degradation increased still further in extreme operating conditions. The serious consequences of power loss and sudden death cannot be risked in passenger transport.

MATRICS' sintered/pbe technology is inherently safe with no possibility of material degradation. It provides an optimum performance even at extreme temperatures.

MATRICS' key features of smaller footprint, reduced weight and size, integral water filling system, integrated tray design, total reliability and minimal maintenance aggregate to optimise initial acquisition cost, and to control operational costs for the long life of the equipment.

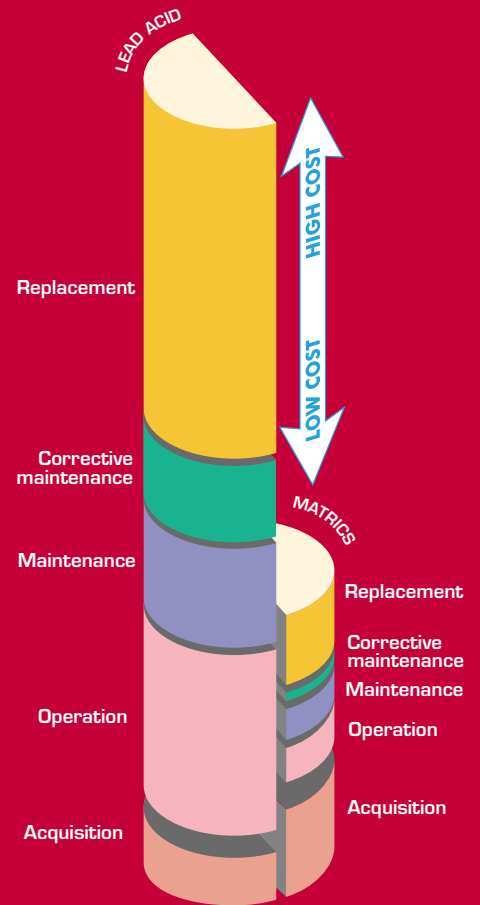

Life cycle costing comparison after 30 years' operation

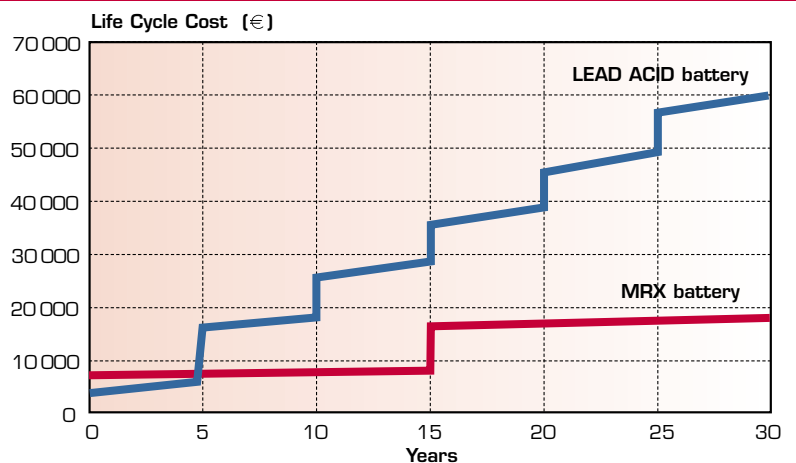

MATRICS Ni-Cd

a new benchmark

Quality without compromise

MATRICS is built around sintered/pbe, the technology that is perfectly tailored to railway operating conditions. Reliability, performance, extended life, low maintenance – all the best features of Ni-Cd are now designed into the MATRICS compact battery.

Many years in service

MATRICS is designed to be a reliable component in your rail system for many years. It will provide up to 15 years of low maintenance service.

Outstanding chargeability

MATRICS displays an excellent charging capability within a constrained voltage window. After 5 hours at low charging voltage (1.45 V/cell), over 90% capacity is available. By using a smaller derating factor for the charge, a smaller battery can be specified and oversizing becomes less necessary. Water consumption is further minimised due to reduced overcharging.

Long maintenance intervals


Owing to its robust construction, reliable technology and design optimised for individual applications, MATRICS requires minimal maintenance – on average, only around every 2 years. Uniquely, sintered/pbe benefits from extremely low water consumption, and when topping-up is required it is carried out simply and reliably through the water-filling apparatus integrated into the MATRICS system.

Wide temperature performance

For medium discharge duties MATRICS performs at a level far superior to lead acid, particularly at the extremes of a wide operating temperature range.

Cutting edge technology

MATRICS has superb performance characteristics coupled with complete reliability to suit passenger vehicles working in tunnels. Batteries are manufactured in flame retardant containers as standard equipment. Cell wall thickness is specially adapted to railway applications.

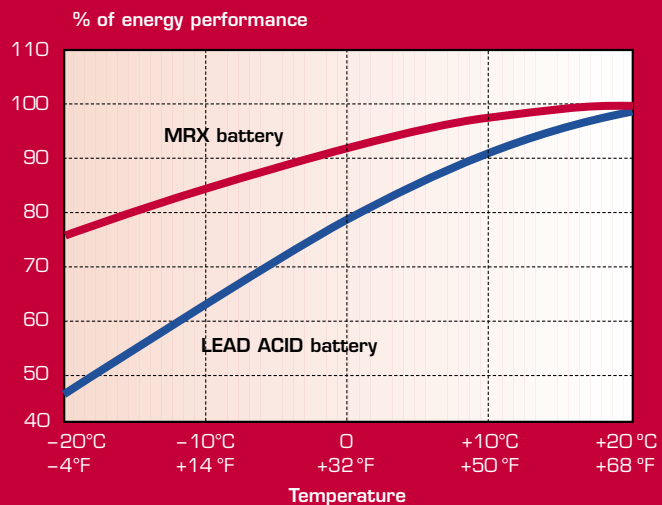


Fully integrated MATRICS

- not just a battery

Integrated water filling system minimises maintenance

MATRICS' maintenance requirements are substantially reduced with Saft's centralised water filling system. Integrated into the block, it channels gases through the system where they are exhausted. The system tops-up cells quickly, safely and accurately, maximising the battery's useful life.

- All cells fill in sequence from a central tank
- Special vents have no moving parts, giving totally reliable performance
- Quick, accurate, cost-saving system
- Simple to operate and easy to disconnect for servicing

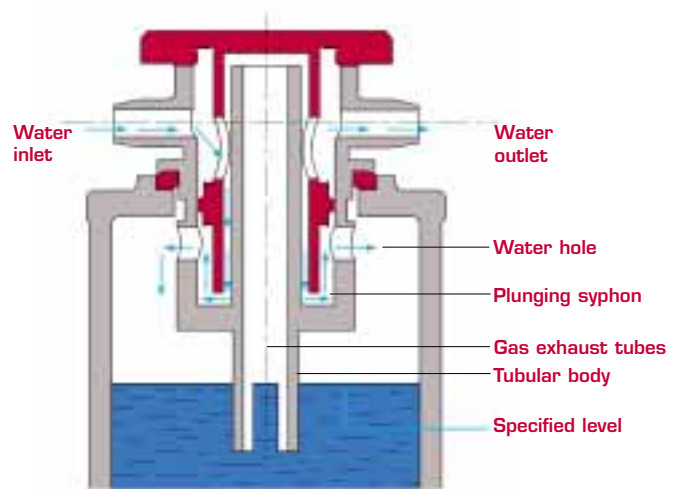


Integrated tray design

Saft designers will optimise your battery system, specifying electrical, mechanical and control functions, including tailored tray design, as a turnkey project. Typical solutions will include detailed specification of

- construction materials
- locking systems
- mechanical and electrical interfaces
- cell restraints
- physical characteristics
- calculated to GMRT 2100 - EN 12663
- vibration and shock tested to IEC 61373

Saft's integrated trays are designed around individual application requirements and enhance the compact size and weight advantages of MATRICS batteries.

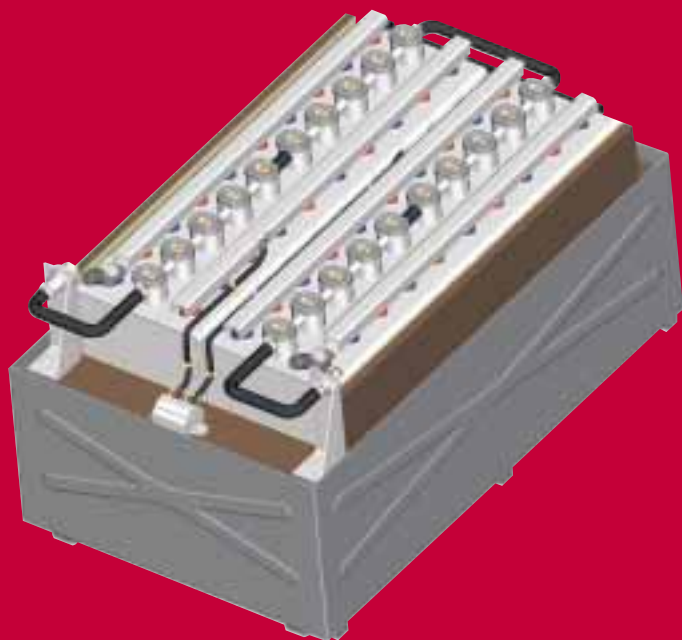

Saft support right from the start

Working as part of your team

Saft offer a turnkey solution based upon a thorough understanding of the rail industry, professional planning, scheduling, and accurate life-cycle costing with reliable quality of service.

From initial engineering design, through sizing and testing to manufacture and implementation, Saft respect your own processes and quality standards to engineer the best all round solution as though it was a single integrated assembly.

ISO quality standard

MATRICES is manufactured at Saft's facility in Bordeaux, France. Here they meet the very stringent ISO 9001 standard. Saft fully appreciate demands for quality products, efficient back-up and professional on-going support. Strategic product development and close integration in the rail industry mean Saft will work in collaboration with its customers to help them to maintain their leading market position for future generations.

Care for the environment

Ni-Cd batteries are pro-actively collected at end-of-life for recycling, a process in which Saft has become expert over many years, and one which is offered free of charge to clients. The simple and unique nature of components ensures maximum utilisation of materials.



MATRICS

made-to-measure

Compact block construction

MATRICS' rigid welded block construction minimises casing material and is a factor in the battery's overall compact size advantage. This method of construction also saves volume, optimising the battery's output and improving life cycle cost.

The positive plate is a structure produced by sintering nickel powder onto a thin, perforated nickel strip, which is then impregnated with nickel hydroxide.

Negative electrodes are plastic-bonded cadmium units, produced by a continuous process culminating in the coated material being trimmed to precise dimensions. The completed plates are connected to the cell's internal steel structure, and housed in tough polypropylene cases.

The MATRICS block, comprising 3 – 10 cells running in parallel or in series with integrated water filling system, is tailored to your particular specification using Saft's proven heat-sealing method.


Saft has gained many years' experience in production of separators. In MATRICS, this technology not only maintains optimum operating efficiency, but, together with wrapped plate stack concept, also contributes to its compact size and lighter weight.

Wrapped plate stack

Positive plate

Membrane separator

Negative plate

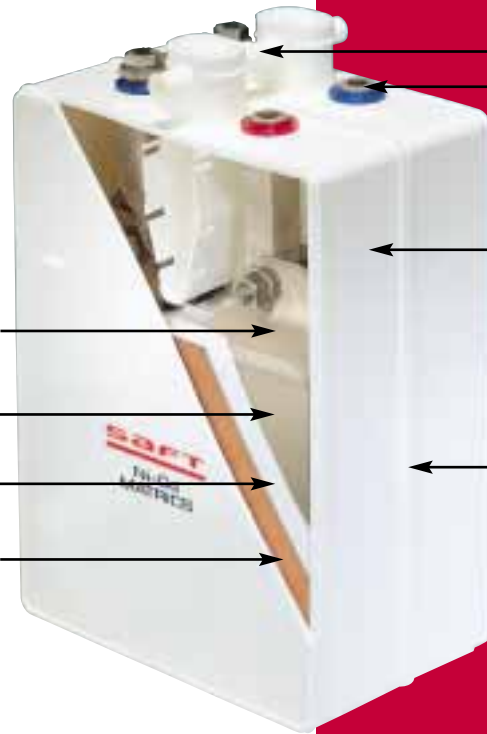

Interconnected integrated water-filling system

Female pole bolt for connection in series or parallel

Heat-sealed block construction

Flame retardant polypropylene case

Meeting recognised standards

MATRICS meets, and often exceeds, the specifications of all major international shock, vibration and electrical standards: IEC 60623/UIC 854, IEC 61373, EN 50155, NFF 60 022, IEC 60077, GMRT 2100 - EN 12663/TTO 179. The system measures up to the very exacting standards laid down for all materials used in rail vehicles, including NFF fire and smoke criteria, and BS standards for gas toxicity.

Additionally, MATRICS exceeds by more than 6 times the requirements of the UIC 854 railway specifications minimum.




Compact power for your rail applications

Mechanical characteristics

Cell type	Rated capacity Ah	Reserve		Height H		Width W		Length per block L								Weight							
		cc	in³	mm	in	mm	in	3 cells mm* in	4 cells mm* in	5 cells mm* in	10 cells mm* in	3 cells kg lb	4 cells kg lb	5 cells kg lb	10 cells kg lb								
MRX 70	70	375	22.9	305	12.0	169	6.65			158	6.22	196	7.72	384	15.1			13	28.7	16	35.3	32	70.6
MRX 80	80	375	22.9	305	12.0	169	6.65			158	6.22	196	7.72	384	15.1			13	28.7	16	35.3	33	72.8
MRX 90	90	370	22.6	305	12.0	169	6.65			158	6.22	196	7.72	384	15.1			14	30.9	17	37.5	34	75.0
MRX 100	100	465	28.4	305	12.0	169	6.65			188	7.40	234	9.21					16	35.3	20	44.1		
MRX 115	115	460	28.1	305	12.0	169	6.65			188	7.40	234	9.21					17	37.5	21	46.3		
MRX 130	130	520	31.7	305	12.0	169	6.65			209	8.23	259	10.2					18	39.7	23	50.7		
MRX 145	145	750	45.8	305	12.0	169	6.65			309	12.2	384	15.1					26	57.3	32	70.6		
MRX 160	160	750	45.8	305	12.0	169	6.65			309	12.2	384	15.1					26	57.3	33	72.8		
MRX 180	180	740	45.2	305	12.0	169	6.65			309	12.2	384	15.1					28	61.7	35	77.2		
MRX 200	200	930	56.8	305	12.0	169	6.65	279	11.0	369	14.5					23	50.7	31	68.4				
MRX 230	230	920	56.1	305	12.0	169	6.65	279	11.0	369	14.5					25	55.1	33	72.8				
MRX 260	260	1040	63.5	305	12.0	169	6.65	310	12.2	410	16.1					27	59.5	36	79.4				

* The block length and weight are determined by the number of cells in the block.

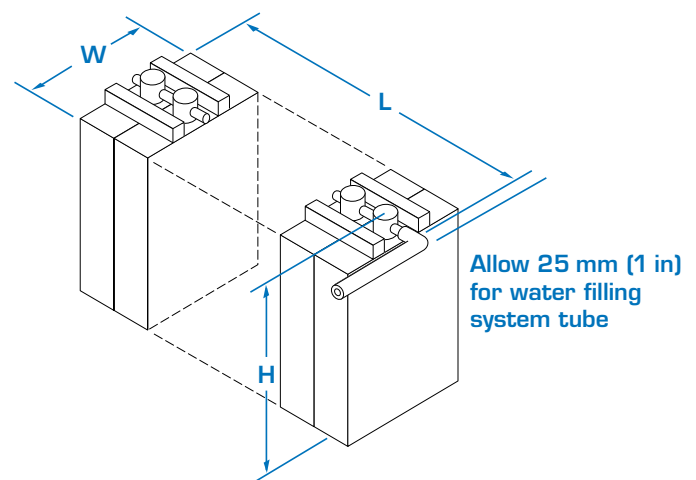

Cell performance

Performance for fully charged cells by a constant current charge according to IEC 60623 standard.

Available amperes at +20°C ± 5°C (+68°F ± 9°F)

End voltage: 1.00 V/cell

Cell type	C ₅ Ah	Hours			Minutes				
		5	3	2	90	60	45	30	15
MRX 70	70	14.0	24.3	36.3	47.9	70.8	91.0	128	213
MRX 80	80	16.0	27.0	40.3	53.2	78.6	101	142	237
MRX 90	90	18.0	31.5	47.1	62.2	91.8	118	166	277
MRX 100	100	20.0	34.2	51.0	67.4	99.5	128	180	300
MRX 115	115	23.0	39.5	59.0	78.0	115	148	208	347
MRX 130	130	26.0	44.9	66.9	88.5	131	168	236	393
MRX 145	145	29.0	48.6	72.5	95.9	142	182	255	426
MRX 160	160	32.0	54.0	80.5	106	157	202	284	473
MRX 180	180	36.0	63.1	94.1	124	184	236	331	553
MRX 200	200	40.0	68.3	102	135	199	256	359	599
MRX 230	230	46.0	79.1	118	156	230	296	416	693
MRX 260	260	52.0	89.7	134	177	261	336	471	787

Available amperes at +20°C ± 5°C (+68°F ± 9°F)

End voltage: 1.05 V/cell

Cell type	C ₅ Ah	Hours			Minutes				
		5	3	2	90	60	45	30	15
MRX 70	70	14.0	24.2	36.5	47.2	68.2	87.0	118	172
MRX 80	80	16.0	26.9	40.5	52.4	75.8	96.7	131	191
MRX 90	90	18.0	31.4	47.3	61.3	88.5	113	153	223
MRX 100	100	20.0	34.1	51.3	66.4	95.9	122	166	242
MRX 115	115	23.0	39.4	59.4	76.8	111	142	192	280
MRX 130	130	26.0	44.7	67.4	87.2	126	161	218	318
MRX 145	145	29.0	48.4	73.0	94.4	136	174	236	344
MRX 160	160	32.0	53.8	81.0	105	152	193	263	382
MRX 180	180	36.0	62.9	94.7	123	177	226	307	447
MRX 200	200	40.0	68.1	103	133	192	245	332	484
MRX 230	230	46.0	78.8	119	154	222	283	385	560
MRX 260	260	52.0	89.4	135	174	252	321	436	636

Cell performance

Performance for fully charged cells by a constant current charge according to IEC 60623 standard.

Available amperes at +20°C ± 5°C (+68°F ± 9°F)

End voltage: 1.10 V/cell

Cell type	C ₅ Ah	Hours			Minutes				
		5	3	2	90	60	45	30	15
MRX 70	70	14.0	23.9	35.2	45.7	64.9	80.3	104	137
MRX 80	80	16.0	26.6	39.1	50.8	72.1	89.1	116	152
MRX 90	90	18.0	31.1	45.6	59.4	84.3	104	135	178
MRX 100	100	20.0	33.7	49.5	64.3	91.3	113	147	193
MRX 115	115	23.0	38.9	57.2	74.4	106	131	170	223
MRX 130	130	26.0	44.2	64.9	84.5	120	148	193	253
MRX 145	145	29.0	47.9	70.3	91.5	130	161	209	274
MRX 160	160	32.0	53.2	78.1	102	144	178	232	305
MRX 180	180	36.0	62.1	91.3	119	169	208	271	356
MRX 200	200	40.0	67.3	98.9	129	183	226	293	386
MRX 230	230	46.0	77.9	114	149	211	261	340	446
MRX 260	260	52.0	88.4	130	169	240	296	385	506

Available amperes at -20°C ± 5°C (-4°F ± 9°F)

End voltage: 1.00 V/cell

Cell type	C ₅ Ah	Hours			Minutes		
		5	3	2	90	60	45
MRX 70	70	13.1	21.4	31.4	40.9	58.4	73.9
MRX 80	80	14.6	23.7	34.8	45.4	64.8	82.1
MRX 90	90	17.0	27.7	40.7	53.0	75.7	95.9
MRX 100	100	18.5	30.1	44.1	57.5	82.1	104
MRX 115	115	21.4	34.8	51.0	66.5	95.0	120
MRX 130	130	24.2	39.5	57.9	75.4	108	136
MRX 145	145	26.3	42.8	62.7	81.7	117	148
MRX 160	160	29.2	47.5	69.7	90.7	130	164
MRX 180	180	34.1	55.5	81.4	106	151	192
MRX 200	200	36.9	60.1	88.2	115	164	208
MRX 230	230	42.7	69.6	102	133	190	241
MRX 260	260	48.5	78.9	116	151	216	273

Committed to a clean environment

Saft takes seriously its responsibility to safeguard the environment.

At several sites worldwide, more than 99% of metals contained in the battery are recycled. This process safeguards valuable natural resources and is a service to customers that Saft will continue to offer for future generations.



To locate the nearest collection site, visit www.saftbatteries.com

Africa

Export sales dpt, France
Tel: +33 1 49 93 19 18
Fax: +33 1 49 93 19 56

Argentina

Energia Alcalina, Buenos Aires
Tel: +54 11 4334 9034/35
Fax: +54 11 4342 5024

Australia

Saft Australia Pty Ltd,
Seven Hills
Tel: +61 2 9674 0700
Fax: +61 2 9620 9990

Austria

Statron GmbH, Wien
Tel: +43 1 617 40 60
Fax: +43 1 617 40 60/40

Belgium

AEG Belgium SA, Brussels
Tel: +32 2 529 6543
Fax: +32 2 529 6449

Brazil

FSE (Fábrica de Sistemas de Energia) Ltda.,
Sao Paulo
Tel: +55 11 6100 6304
Fax: +55 11 6100 6338

Canada Please contact USA office.

Chile

Techno Parts Ltda.,
Santiago
Tel: +56 (2) 249 6060

China

Saft Trading
Tel: +86 21 5866 7935
Fax: +86 21 5866 6403

Czech Republic

Saft Ferak a.s., Prague
Tel: +420 281 080 120
Fax: +420 281 080 119

Denmark

Scansupply A/S, Birkerød
Tel: +45 45 82 50 90
Fax: +45 45 82 54 40

Finland

HansaBattery Oy, Espoo
Tel: +358 9 260 65 292
Fax: +358 9 260 65 299

France

Division France, Bagnolet
Tel: +33 1 49 93 19 18
Fax: +33 1 49 93 19 64

Germany

Saft Batterien GmbH,
Nürnberg
Tel: +49 911 94 174-0
Fax: +49 911 426 144

Hong Kong

Saft Ltd, Kowloon
Tel: +852 2796 99 32
Fax: +852 2798 06 19

India sub continent

Export sales dpt, Sweden
Tel: +46 491 680 00
Fax: +46 491 681 80

Italy

Saft Batterie Italia S.r.l.,
Segrate (Milano)
Tel: +39 02 89 28 07 47
Fax: +39 02 89 28 07 62

Japan

Sumitomo Corp., Tokyo
Tel: +81 3 5144 9082
Fax: +81 3 5144 9267

Korea

Energys Korea Co. Ltd,
Kyunggi-Do
Tel: +82 2501 0033
Fax: +82 2501 0034

Mexico

Troop y Compania, SA de CV,
Mexico
Tel: +52 55 50 82 10 30
Fax: +52 55 50 82 10 39

Middle East

Saft Nife ME Ltd,
Limassol, Cyprus
Tel: +357 25 820040
Fax: +357 25 748492

Netherlands

Saft Batteries B.V.,
Haarlem
Tel: +31 23 750 5720
Fax: +31 23 750 5725

Norway

Saft AS, Osteraas
Tel: +47 6716 4160
Fax: +47 6716 4170

Russia

ZAO Alcatel, Moscow
Tel: +7 095 937 0967
Fax: +7 095 937 0906

Singapore

Saft Batteries Pte Ltd,
Singapore
Tel: +65 6512 1500
Fax: +65 6749 7282

Spain

Saft Baterias S.L.,
San Sebastian de los Reyes
Tel: +34 916 59 34 80
Fax: +34 916 59 34 90

Sweden

Saft AB, Oskarshamn
Tel: +46 491 680 00
Fax: +46 491 681 80

Switzerland

Statron AG, Mägenwil
Tel: +41 62 887 4 887
Fax: +41 62 887 4 888

United Kingdom

Saft Ltd, Harlow
Tel: +44 1279 772 550
Fax: +44 1279 420 909

USA

Saft America Inc.,
Cockeysville, (MD)
Tel: +1 410 771 3200
Fax: +1 410 771 1144

Venezuela

Corporación INTELEC C.A.,
Caracas
Tel: +58 212 9631 122

Saft

Industrial Battery Group

12, rue Sadi Carnot
93170 Bagnolet – France
Tel: +33 1 49 93 19 18
Fax: +33 1 49 93 19 64

www.saftbatteries.com

Doc N° 21116-2-0704

Edition: July 2004

Data in this document is subject to change without notice and becomes contractual only after written confirmation.

Photo credit: Alstom Transport, Ansaldo-Breda, Bombardier, Digitalvision, Jean Isenmann, Photodisc, Saft, Siemens, TALGO.

Société anonyme au capital de 31 944 000 €
RCS Bobigny B 383 703 873

Prepared by Arthur Associates Limited.



SAFT